

Installation of the 1005-249-20 Gen II Tactical Latch for use with the M16 series AR-15 series AR-10 and SR-25 rifles

WEAR SAFETY GLASSES, SPRING UNDER COMPRESSION

1. With the weapon safe and unloaded, separate receivers as your rifles instruction manual details.
2. Remove Bolt Carrier assy. and charging handle.
3. Using a 1/16" pin punch, remove the existing Latch pin (*Fig. 1*) CAUTION MUST BE TAKEN! the spring is under compression.
4. Reverse the process with your TACTICAL LATCH, insert spring, compress with latch, and install punch (*fig. 2*).
5. Now the Retaining pin may be installed (*fig. 3*).

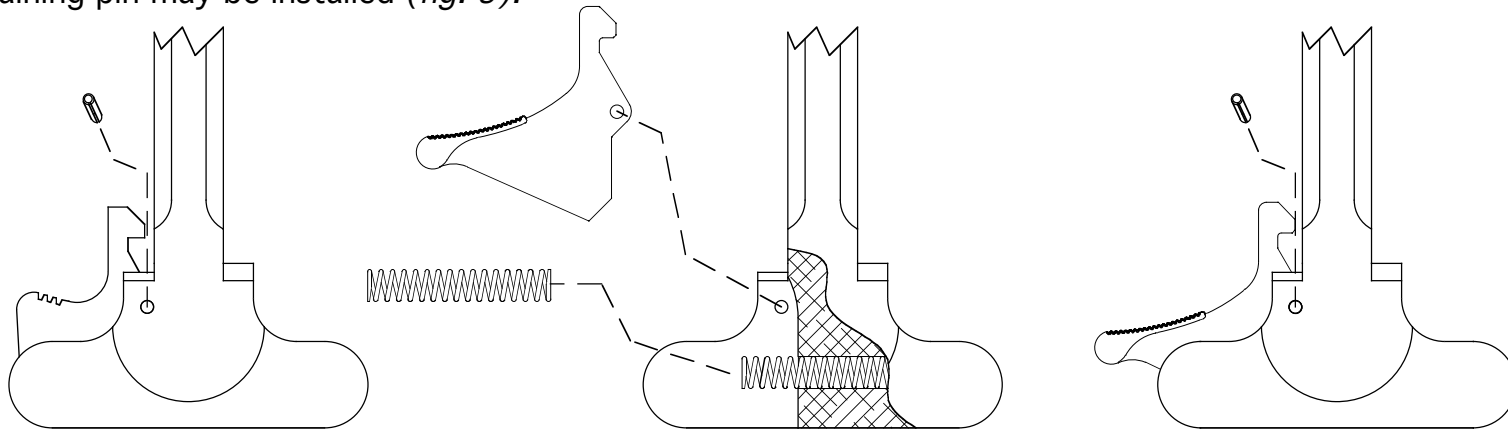


fig. 1

fig. 2

fig. 3